



Frame Hinge and Strike Locations
 1 3/4" Dutch with 4 Each 4" Hinges

NOTE: When using this chart for premachining door measurements, reduce the A & E dimensions 3/32" each for door clearance.

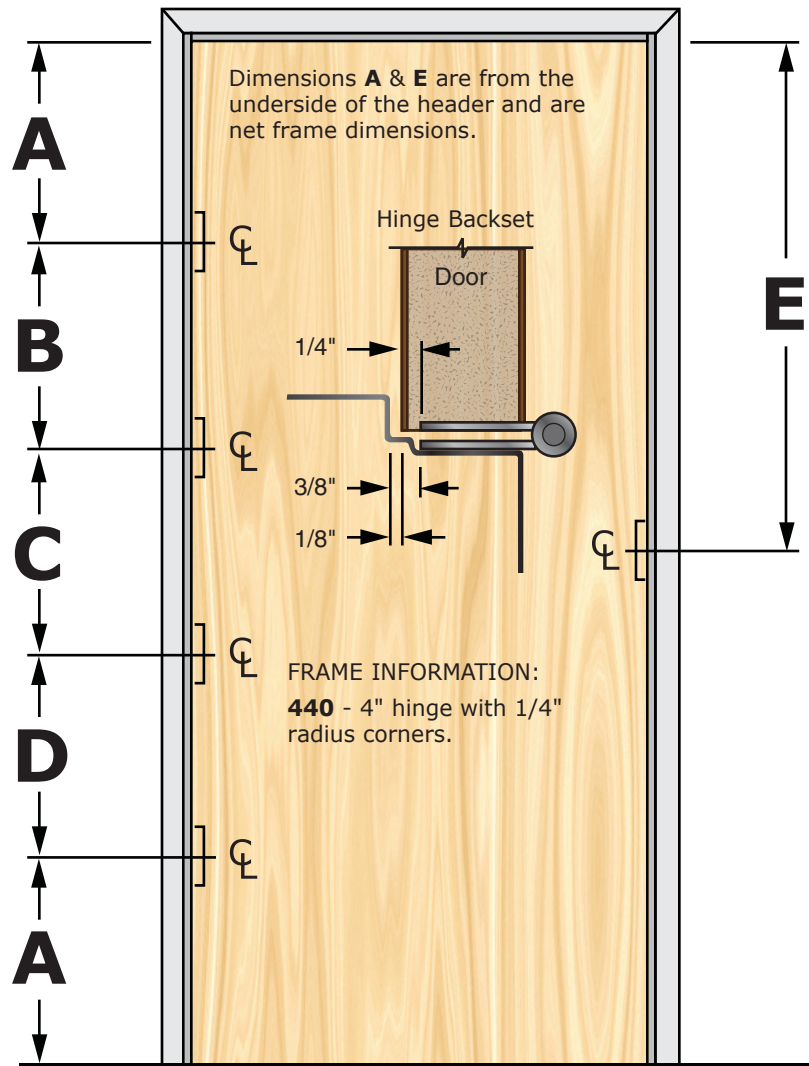


NET FRAME DIMENSIONS					
HEIGHT	A	B	C	D	E
6-0	5-3/32	21-1/2	11	29-1/2	36-3/32
6-8	5-3/32	29-1/2	11	29-1/2	44-3/32
6-9	5-3/32	30-1/2	11	29-1/2	45-3/32
6-10	5-3/32	31-1/2	11	29-1/2	46-3/32
7-0	5-3/32	33-1/2	11	29-1/2	48-3/32
7-2	5-3/32	35-1/2	11	29-1/2	50-3/32
7-4	5-3/32	37-1/2	11	29-1/2	52-3/32
7-6	5-3/32	39-1/2	11	29-1/2	54-3/32
7-8	5-3/32	41-1/2	11	29-1/2	56-3/32
7-10	5-3/32	43-1/2	11	29-1/2	58-3/32
8-0	5-3/32	45-1/2	11	29-1/2	60-3/32
8-2	5-3/32	47-1/2	11	29-1/2	62-3/32
8-4	5-3/32	49-1/2	11	29-1/2	64-3/32
8-6	5-3/32	51-1/2	11	29-1/2	66-3/32
8-8	5-3/32	53-1/2	11	29-1/2	68-3/32
8-10	5-3/32	55-1/2	11	29-1/2	70-3/32
9-0	5-3/32	57-1/2	11	29-1/2	72-3/32
9-4	5-3/32	61-1/2	11	29-1/2	76-3/32
9-8	5-3/32	65-1/2	11	29-1/2	80-3/32
10-0	5-3/32	69-1/2	11	29-1/2	84-3/32

+ Frame Heights are 3/16" longer than callout door height unless ordered net. (3/32" top, 3/32" bottom for clearance).

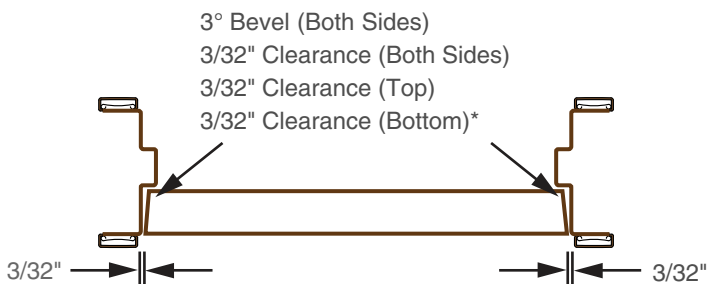

*Additional clearance is required for Thresholds and various floor conditions.

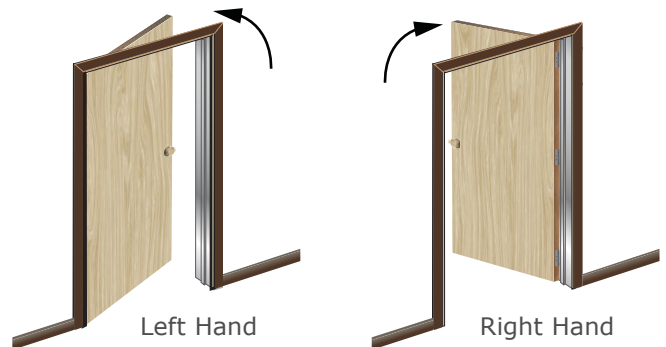

Handing Information: To establish handing always **Push** the door away from you.

*Reversible - Frame can be used as Left or Right Hand, swing in or out

FOR SPECIFICATIONS NOT SHOWN, PLEASE CONSULT OFFICE.